



## Specifications ITR 709 012

### Isolating transformer

interISOLATE transformers can be used in every industrial applications where reliable galvanic isolation is needed. They are often used at industry for isolation and voltage adjustment.

interISOLATE transformers can be ordered fully customized by your requirements. All transformers are equipped with insulation between primary and secondary coil. Transformers can also be ordered with primary and/or secondary circuit protectors.

Intertrafo Oy manufactures all wounded components in accordance with the IEC-standards. Other standards on customers request.

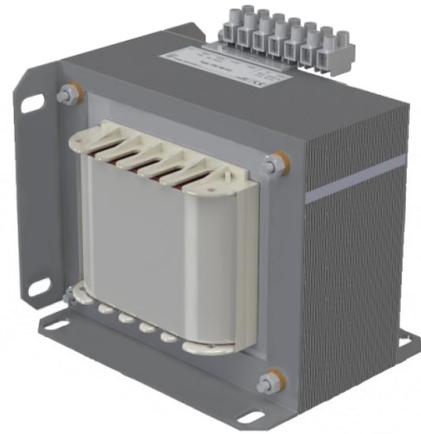

<i>Primary</i>	400, 415, 440Vac
<i>Secondary</i>	230Vac
<i>Rating</i>	1500 VA
<i>Frequency</i>	47 - 63Hz
<i>Protection degree</i>	IP00
<i>Thermal Class</i>	B (130°C)
<i>Ambient temperature</i>	40°C
<i>Terminals</i>	Terminal block, 6mm <sup>2</sup>
<i>Dimensions, weight</i>	180 x 145 x 173 mm, 16,9 kg
<i>Standards</i>	EN61558 - 2 - 4

